

Smart Water Monitoring System for Real-Time Water Quality and Usage Monitoring

Asst. Prof. Pratibha V. Kashid¹, Nitin Gaikwad², Saurabh Bagul³

Priya Deshmukh⁴, Priyanka Marchande⁵

^{1,2,3,4,5}Dept. of IT, SVIT Institute of Technology, Nashik, India

ABSTRACT:- Conventional water metering has a tendency of being unreliable, inaccurate, and a source of dispute and disquiet among customers, and hence it is considered to be one primary reason why water service providers perform poorly and have very low revenue collection. To develop a prepaid metering project to see whether or not prepayment can be considered to be an innovative way of addressing these concerns, especially how to provide better service, when providing water to the urban poor. To design and development of a water quality monitoring system, with the objective of notifying the user of the real-time water quality parameters. Also to measure physiochemical parameters of water quality, such as flow, temperature, pH, conductivity and the oxidation reduction potential. These physiochemical parameters are used to detect water contaminants.

Key Words:

Water quality monitoring, flow sensor, pH sensor, conductivity sensor, Communal prepaid metering

1. INTRODUCTION:

CLEAN water is one of the most important resources required to sustain life and the quality of drinking water plays a very important role in the well-being and health of human beings. Water supply to taps at urban homes and water sources available in more rural areas, is however, not necessarily safe for consumption. Even though it is the government's responsibility to ensure that clean water is delivered to its citizens, ever aging infrastructure, which is poorly maintained and continual increase in population, puts a strain on the supply of clean water. It is thus paramount to monitor the quality of water which will be used for consumption. In monitoring is defined as the collection of information at set locations and at regular intervals in order to provide data which may be used to define current conditions, establish trends, etc. Traditional water quality monitoring methods involve sampling and laboratory techniques. These methods are however time consuming (leading to delayed detection of and response to contaminants) and not very cost effective. There is thus a need for more extensive and efficient monitoring methods. Water meters are activated using tokens that are bought from the water service provider. The tokens are uploaded with credit at designated pay-points and water users can draw water up to the amount credited in the token. The prepaid meters

were installed to improve the quality of water service delivery to increase collection of government

2. LITERATURE SURVEY:

Various studies involving the implementation of water quality monitoring systems using wireless sensor network (WSN) technology can be found in literature.

In a distributed system for measuring water quality is designed and implemented. Temperature, conductivity, pH and turbidity sensors are connected to a field point, wherefrom data is sent using a GSM (global system for mobile communications) network to a land based station. The focus of this study is however on the processing of the sensor data using Kohonen maps (auto-associative neural networks). A WSN-based water environment system which senses and

monitors video data of key areas and water parameters such as temperature, turbidity, pH, dissolved oxygen and conductivity is presented in Data is sent from the data monitoring nodes and data video base station to a remote monitoring center using ZigBee and CDMA (code division multiple access) technology.

The water monitoring system implemented in analyses and processes water quality parameters (pH, conductivity, dissolved oxygen and temperature), and also sounds an alarm when there is a water contamination, or change in water quality. The parameters are measured with off-the shelf sensors and data is sent to a base station via GPRS (general packet radio service).

In a ZigBee based WSN water quality monitoring and measurement system is presented. The system enables remote probing and real-time monitoring of the water quality parameters and also enables observation of current and historical water quality status.

A river basin scale WSN for agriculture and water monitoring, called Soil Weather is implemented in [17]. The network uses GSM and GPRS technology for transmission of sensor data.

A turbidity system is proposed in which is low-powered, small-sized, easy-to-use and inexpensive.

In the DEPLOY project is introduced to monitor the spatial and temporal distribution of water quality and environmental parameters of a river catchment. It is intended to demonstrate that an autonomous network of sensors can be deployed over a wide area and the system measures parameters such as pH, temperature, depth, conductivity, turbidity and dissolved oxygen.


A microcontroller-based WSN system is proposed into measure pH, chlorine concentration and temperature in a pool. Data is transmitted using GSM and in sleep mode the sensor nodes are shown to consume 27 μ A.

In a WSN system is used to measure the water quality of fresh water and uses solar daylight harvesting for optimized power management.

The data collected from the various sensor nodes are sent to a sub-base node and from there to a monitoring station using a GSM network. A low-cost, real-time, in-pipe sensor node with a sensor array for measuring flow, pH, conductivity, ORP and turbidity, is designed and developed in Contamination event detection algorithms are also developed to enable sensor nodes to make decisions and trigger alarms when contaminants are detected.

In a WSN based on ISO/IEC/IEEE 21451 standard for monitoring of surface water bodies is presented, to capture possible severe events and collect extended periods of data. As can be observed from the literature study, most water quality monitoring systems have sensing nodes, are able to perform wireless communication and process the data from the sensors to achieve meaningful results.

3. PROPOSED SYSTEM:

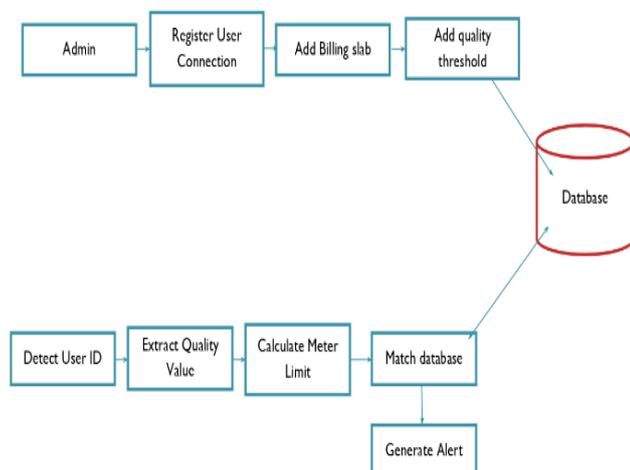

Block Diagram

(3.1). Admin:

Admin User is able to register new connection based on the eligibility.

(3.2). Add Funds:

To allocate funds or to prepaid recharge of the new connections.

(3.3). Add Quality Threshold:

To set quality threshold value of the water, this value will be used to check sensor values and generate alerts.

(3.4). Flow Algorithm:

Algorithm and the flowchart for the operation of system. The algorithm of operation based on the same is as follows:

- Once a user opts for a new water supply connection, a unique user ID is provided and the system is set up at the user's household.
- The water supply to the household starts.
- At the entry point to the house, the quality of the water is checked.
- The Water Quality sensor nodes collect the parameter values and serially send it to the Microcontroller.
- Based on the standard quality parameters, the Microcontroller decides whether the water is portable and fit for drinking or not.
- If the water is fit for drinking, the water supply to the house continues.
- Based on the prepaid recharge done, the water consumption is checked. After recharge limit is crossed, a notification is sent to the user as well as the authority mentioning the amount of water consumed from the start of the month till that point of time. The water flow continues until another limit is crossed. For each of the three limits, the cycle repeats.
- After another recharge of prepaid bill, the readings are reset and water supply for next month begins.
- In case the water is not fit for drinking, a notification is sent to the user and authority along with the physical parameter values of the water.
- The water supply is immediately stopped to prevent any accidental consumption of impure water, and the supply remains closed until the water quality issue is resolved.

4. CONCLUSION:

The Smart water quality check meter is automatic and does not require much human interference, thereby reducing the errors. The real-time monitoring provides immediate remote access to the water quality as well as quantity data for any household. All these measures aim at bringing down the unnecessary usage of water and prevention of health hazards caused due to consumption of impure water.

5. REFERENCES:

- [1] WHO, "Guidelines for drinking-water quality," 2011, http://www.who.int/water_sanitation_health/publications/dwq-guidelines-4/en/. Last accessed on 31 May 2016.
- [2] M. Goldblatt, "Realising the right to sufficient water in south africa's cities," *Urban Forum*, vol. 8, no. 2, pp. 255–276, 1997.
- [3] S. Heleba, "The right of access to sufficient water in south africa how far have we come," *Law, Democracy and Development*, vol. 15, no. 1, pp. 10–13, 2011.
- [4] G. Mackintosh and C. Colvin, "Failure of rural schemes in south Africa to provide potable water," *Environmental Geology*, vol. 44, no. 1, pp. 101–105, 2003.
- [5] K. Eales, "Water services in south africa 1994-2009," *Global Issues in Water Policy*, 2010.
- [6] D. Chapman, *Water Quality Assessments - A guide to Use of Biota, Sediments and Water in Environmental Monitoring*, 2nd ed. London, UK: F and FN Spon, 1996.
- [7] O. Korostynska, A. Mason, and A. Al-Shammaa, "Monitoring pollutants in wastewater: Traditional lab based versus modern real-time approaches," *Smart Sensors, Measurement and Instrumentation*, vol. 4, 2013.
- [8] T. Lambrou, C. Anastasiou, C. Panayiotou, and M. Polycarpou, "A low-cost sensor network for real-time monitoring and contamination detection in drinking water distribution systems," *IEEE Sensors Journal*, vol. 14, no. 8, pp. 2765–2772, 2014.
- [9] A. Dufour, M. Snozzi, W. Koster, J. Bartram, E. Ronchi, and L. Fewtrell, *Assessing Microbial safety of drinking water: Improving approaches and methods*. London, UK: IWA Publishing, 2003.
- [10] J. Hall, A. D. Zaffiro, R. B. Marx, P. C. Kefauver, E. R. Krishnan, R. C. Haught, and J. G. Herrmann, "On-line water quality parameters as indicators of distribution system contamination," *Journal of the American Water Works Association*, vol. 99, no. 1, pp. 66–77, 2007.
- [11] A. V. V. Yanjun Yao, Qing Cao, "An energy-efficient, delay-aware, and lifetime-balancing data collection protocol for heterogeneous wireless sensor networks," *IEEE/ACM Transactions on Networking*, vol. 23, no. 3, pp. 810–823, 2015.
- [12] M. V. Storey, B. van der Gaag, and B. P. Burns, "14. advances in on-line drinking water quality monitoring and early warning systems," *Water Research*, vol. 45, no. 2, pp. 741–747, 2011.
- [13] O. Postolache, P. Girao, J. Pereira, and H. Ramos, "Wireless water quality monitoring system based on field point technology and kohonen maps," in *Canadian Conference on Electrical and Computer Engineering, IEEE CCECE 2003, 4-7 May 2003, Montreal, Canada*, vol. 3, 2003, pp. 1873–1876.
- [14] Y. Kong and P. Jiang, "Development of data video base station in water environment monitoring oriented wireless sensor networks," in *In Proceedings of the International Conference on Embedded Software and Systems Symposia, 29-31 July 2008, Sichuan, China, 2008*, pp. 281–286.
- [15] P. Jiang, H. Xia, Z. He, and Z. Wang, "Design of a water environment monitoring system based on wireless sensor networks," *Sensors*, vol. 9, no. 8, pp. 6411–6434, 2009.
- [16] Z. Wang, Q. Wang, and X. Hao, "The design of the remote water quality monitoring system based on wsn," in *2009 5th International Conference on Wireless Communications, Networking and Mobile Computing, 24-26 Sept. 2009, Beijing, China, 2009*, pp. 1–4.
- [17] N. Kotamaki, S. Thessler, J. Koskiahio, A. Hannukkala, H. Huita, T. Huttula, J. Havento, and M. Jarvenpaa, "Wireless in-situ sensor network for agriculture and water monitoring on a river basin scale in southern finland: Evaluation from a data user's perspective," *Sensors*, vol. 9, no. 4, pp. 2862–2883, 2009.
- [18] T. Lambrou, C. Anastasiou, and C. Panayiotou, "A nephelometric turbidity system for monitoring residential drinking water quality," *Sensor Applications, Experimentation, and Logistics*, vol. 29, 2010.
- [19] A. K. J. T. W. A. N. R. Malekian, Dijana Capeska Bogatinoska, "A novel smart eco model for energy consumption optimization," *Elektronika ir Elektrotechnika*, vol. 21, no. 6, pp. 75–80, 2015.
- [20] B. O'Flynn, F. Regan, A. Lawlor, J. Wallace, J. Torres, and C. O'Mathuna, "Experiences and recommendations in deploying a real-time, water quality monitoring system," *Measurement Science and Technology*, vol. 21, no. 12, pp. 4004–4014, 2010.

[21] W. Chung, C. Chen, and J. Chen, "Design and implementation of low power wireless sensor system for water quality," in 5th International Conference on Bioinformatics and Biomedical Engineering ICBBE 2011, 10-12 May 2011, Wuhan, China, 2011, pp. 1-4.

[22] M. Nasirudin, U. Za'bah, and O. Sidek, "Fresh water real-time monitoring system based on wireless sensor network and gsm," in IEEE Conference on Open Systems (ICOS), 25-28 May 2011, Langkawi, Malaysia, 2011, pp. 354-357.

[23] F. Adamo, F. Attivissimo, C. Carducci, and A. Lanzolla, "A smart sensor network for sea water quality onitoring," IEEE Sensors Journal, vol. 15, no. 5, pp. 2514-2522, 2015.

[24]As can be observed from the literature study, most water quality monitoring systems have sensing nodes, are able to perform wireless communication and process the data from the sensors to achieve meaningful results.